

SMD Power Inductor

1. Features

1. Low loss with low DCR.
2. High performance realized by metal dust core.
3. Ultralow buzz noise, due to composite construction.
4. 100% Lead(Pb)-Free & Halogen-Free and RoHS compliant.
5. High reliability-complied with AEC-Q200.


AEC-Q200




2. Applications

For automotive applications.

3. Dimensions

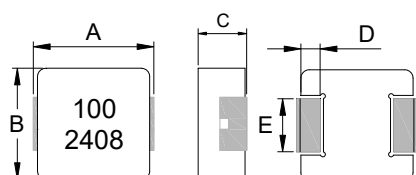

leadframe

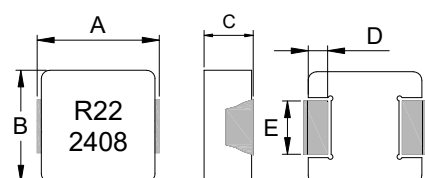


non-leadframe

A	B	C	D	E
13.5±0.5	12.6±0.2	6.2±0.3	2.3±0.3	See Spec table

Unit:mm

Recommend PC Board Pattern



L	G	H
14.5	8.0	5.0

Note:

1. PCB layout is referred to IPC-7351B standard.
2. The above PCB layout is for reference only.

4. Part Numbering

FMPA	1265	SPV	-	100	MN	-	D
A	B	C		D	E		F

A: Series

B: Dimension

C: Type

D: Inductance

E: Inductance Tolerance

F: Code

BxC

Standard. V: Vehicle

100=10.0uH

M=±20%

Marking Black 100 and 2408 (24 YY 08 WW follow production date).

Anti-static packaging

5. Specification

Part Number	Inductance (uH) $\pm 20\%$ @ 0 A DC	Irms (A)		I sat (A)		DCR (mΩ)		E(mm) ± 0.3	Q (Min)	SRF (MHz) Ref	Impulse Voltage	Type
		Typ	Max	Typ	Max	Typ	Max					
FMPA1265SPV-R10YN-D	0.10 $\pm 30\%$	65	60	120	115	0.2	0.25	4.7	8	400	$\geq 100V$	non-leadframe
FMPA1265SPV-R22MN-D	0.22	53	42	112	105	0.4	0.46	4.7	20	130	$\geq 100V$	non-leadframe
FMPA1265SPV-R33MN-D	0.33	46	36	75	65	0.6	0.7	4.7	20	80	$\geq 100V$	non-leadframe
FMPA1265SPV-R47MN-D	0.47	42	35	68	58	0.88	1.02	4.7	20	70	$\geq 100V$	non-leadframe
FMPA1265SPV-R56MN-D	0.56	37	33.5	57	50	1.1	1.3	4.0	20	62	$\geq 100V$	non-leadframe
FMPA1265SPV-R68MN-D	0.68	36.5	33	55	46	1.25	1.5	4.0	20	58	$\geq 100V$	non-leadframe
FMPA1265SPV-1R0MN-D	1.00	33	29	45	36	1.5	1.8	4.0	20	43	$\geq 100V$	non-leadframe
FMPA1265SPV-1R5MN-D	1.50	29	25	35	30	2.2	2.53	4.0	20	33	$\geq 100V$	non-leadframe
FMPA1265SPV-2R2MN-D	2.20	25	21	28.5	24	3.7	4.2	4.7	20	22	$\geq 150V$	leadframe
FMPA1265SPV-3R3MN-D	3.30	22	19	27	22.5	5.3	6.2	4.7	20	17	$\geq 150V$	leadframe
FMPA1265SPV-4R7MN-D	4.70	20	17	25	21	6.8	8.0	4.7	20	17	$\geq 150V$	leadframe
FMPA1265SPV-5R6MN-D	5.60	18	15	23	19.5	8.3	9.8	4.7	20	15	$\geq 150V$	leadframe
FMPA1265SPV-6R8MN-D	6.80	16.5	14	21	18	9.8	11.3	4.7	20	12	$\geq 150V$	leadframe
FMPA1265SPV-8R2MN-D	8.20	15	12.5	19	17	12	13.8	4.7	20	10	$\geq 150V$	leadframe
FMPA1265SPV-100MN-D	10.0	13	11	17	15	13	15.8	4.7	20	10	$\geq 150V$	leadframe
FMPA1265SPV-150MN-D	15.0	11	9.5	13.5	12	22	26	4.7	20	9	$\geq 150V$	leadframe
FMPA1265SPV-220MN-D	22.0	10	8	10	9	31	35	4.7	20	6	$\geq 150V$	leadframe
FMPA1265SPV-330MN-D	33.0	9.0	6.5	9.0	8.0	46	55	4.7	20	4	$\geq 80V$	leadframe
FMPA1265SPV-470MN-D	47.0	8.0	5.7	7.6	6.8	58	67	4.7	20	4	$\geq 80V$	leadframe
FMPA1265SPV-680MN-D	68.0	5.8	4.8	6.0	5.0	82	100	4.7	20	3	$\geq 80V$	leadframe
FMPA1265SPV-820MN-D	82.0	5.0	4.0	5.0	4.2	110	132	4.7	20	3	$\geq 80V$	leadframe
FMPA1265SPV-101MN-D	100	5.0	3.8	5.0	4.0	140	161	4.7	20	3	$\geq 80V$	leadframe

Note:

1. Test frequency : 100KHz /1.0V.
2. All tested at 25°C ambient.
3. Testing Instrument (or eq.): Agilent 4284A,E4991A,4339B,KEYSIGHT E4980A/AL,chroma3302,3250,16502
4. Heat rated current (Irms): current that cause temperature to rise approximately ΔT of 40°C.
5. Saturation current (Isat) : current that cause L0 to drop approximately 30%.
6. The part temperature (ambient + temp. rise) should not exceed 155°C under worst case operating conditions. Circuit design, PCB trace and thickness, airflow and other cooling conditions all affect the part temperature. Part temperature should be verified in the end application.
7. Irms Test : temperature rise is highly dependent on many factors including pcb land pattern, trace size, and proximity to other components. Therefore temperature rise should be verified in application conditions.
8. Rated DC current: the lower value of Irms and Isat.

6. Typical Performance Curves

