


SMD Power Inductor **HPC4018BMV-Series**

1. Features

1. This specification applies Low Profile Power Inductors.
2. 100% Lead(Pb) & Halogen-Free and RoHS compliant.
3. High reliability -Reliability test meet AEC-Q200
4. Operating temperature:-55~+125°C (Including self - temperature rise)




2. Dimension

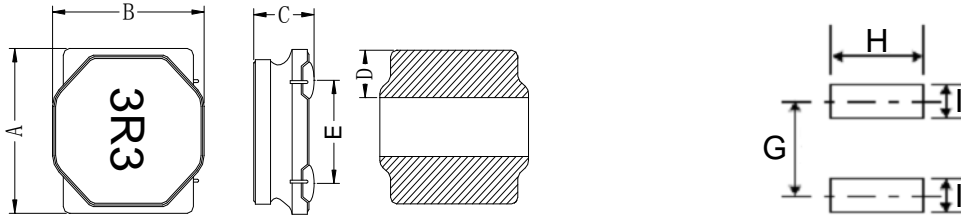

Series	A	B	C	D	E	G	H	I
HPC4018BMV	4.0±0.2	4.0±0.2	1.8 max.	1.1±0.2	2.5±0.2	2.8 ref.	3.7 ref.	1.2 ref.

Units: mm

3. Part Numbering



- A: Series
 - B: Dimension
 - C: Control S/N
 - D: Category Code
 - E: Inductance
 - F: Inductance Tolerance
- marking direction cannot decide polarity. Color: Black
 V=Vehicle
 3R3=3.30uH
 M=±20% Y=±30%

4. Specification

Part Number	Inductance (uH)	Tolerance (%)	Test Frequency (Hz)	SRF (MHz) min.	DCR (Ω) ±20%	I rms (A)	I sat (A)
HPC4018BMV-R56M	0.56	±20%	1V100K	100	0.019	4.50	5.00
HPC4018BMV-1R0Y	1.0	±30%	1V100K	90	0.027	3.20	4.00
HPC4018BMV-1R2Y	1.2	±30%	1V100K	82	0.030	2.80	3.70
HPC4018BMV-1R5Y	1.5	±30%	1V100K	75	0.037	2.40	3.30
HPC4018BMV-1R8M	1.8	±20%	1V100K	67	0.040	2.30	3.20
HPC4018BMV-2R2M	2.2	±20%	1V100K	60	0.042	2.20	3.00
HPC4018BMV-3R3M	3.3	±20%	1V100K	45	0.055	2.00	2.30
HPC4018BMV-4R7M	4.7	±20%	1V100K	35	0.070	1.70	2.00
HPC4018BMV-6R8M	6.8	±20%	1V100K	30	0.098	1.45	1.60
HPC4018BMV-7R5M	7.5	±20%	1V100K	42	0.120	1.35	1.50
HPC4018BMV-100M	10	±20%	1V100K	25	0.150	1.20	1.30
HPC4018BMV-150M	15	±20%	1V100K	18	0.210	0.85	1.10
HPC4018BMV-220M	22	±20%	1V100K	15	0.290	0.72	0.90
HPC4018BMV-330M	33	±20%	1V100K	12	0.460	0.55	0.70
HPC4018BMV-470M	47	±20%	1V100K	10	0.650	0.44	0.60
HPC4018BMV-680M	68	±20%	1V100K	8.3	1.00	0.32	0.52
HPC4018BMV-101M	100	±20%	1V100K	6.5	1.45	0.28	0.42
HPC4018BMV-151M	150	±20%	1V100K	5.5	2.30	0.22	0.34
HPC4018BMV-221M	220	±20%	1V100K	4.0	3.80	0.17	0.275

Note:
 Isat : Based on inductance change (ΔL/L0 : ≤-30%) @ ambient temp. 25°C
 I rms : Based on temperature rise (ΔT : 40°C typ.)

5. Typical Performance Curves

