


Wire Wound Power Common Mode Filter FWCM5555FASV-SERIES-LM

1. Features

1. High reliability -Reliability tests comply with AEC-Q200
2. Operating temperature-40~+125°C (Including self - temperature rise)



2. Dimension

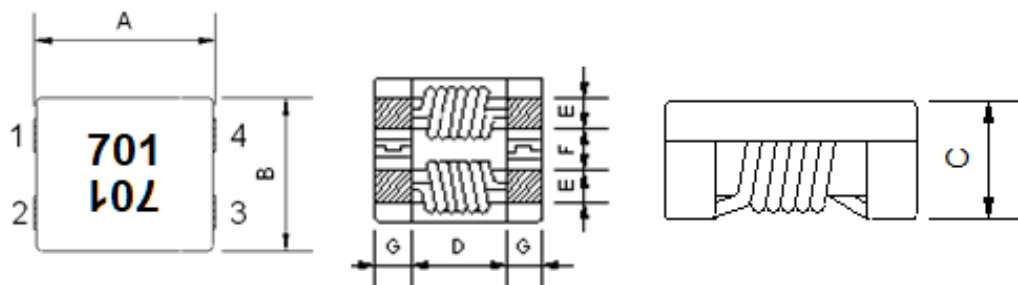

Series	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)
FWCM5555	5.5±0.5	5.5±0.5	3.5 max.	3.3 typ.	1.2±0.5	1.9±0.5	1.1±0.5

Unit:mm

3. Part Numbering

FWCM	5555	F	A	S	V	-	701	-	LM
A	B	C	D	E	F		G		H

A: Series

B: Dimension

C: Material

Ferrite Core

D: Process

Assembled

E: Type

S=Shielded , N=Unshielded

F: Category Code

V=Vehicle

G: Impedance

701=700Ω

H: Laser Marking

4. Specification

TAI-TECH Part Number	Impedance (Ω)		Test Frequency (MHz)	DC Resistance (mΩ) max. (1 line)	Rated Current (A) max.	Rated Volt. (Vdc) max.	Insulation Resistance (MΩ) min.
	min.	typ.					
FWCM5555FASV-101-LM	100	140	100	6.0	8.5	80	10
FWCM5555FASV-301-LM	150	300	100	7.5	4.8	80	10
FWCM5555FASV-501-LM	300	500	100	10.5	4.5	80	10
FWCM5555FASV-701-LM	500	700	100	13.0	3.8	80	10
FWCM5555FASV-102-LM	750	1000	100	20.0	3.0	80	10
FWCM5555FASV-142-LM	1000	1400	100	38.0	2.8	80	10

Note:







Measurement board data

Material : FR4


Board dimensions : 100 X 50 X 1.6t mm

Pattern dimensions: 45 X 30 mm (Double side board)

Pattern thickness : 50 μm

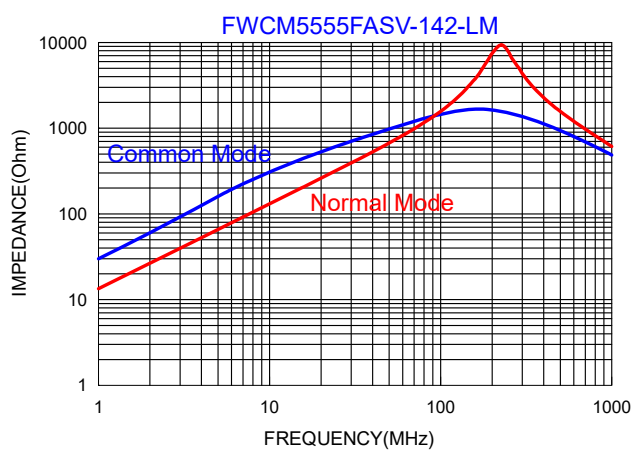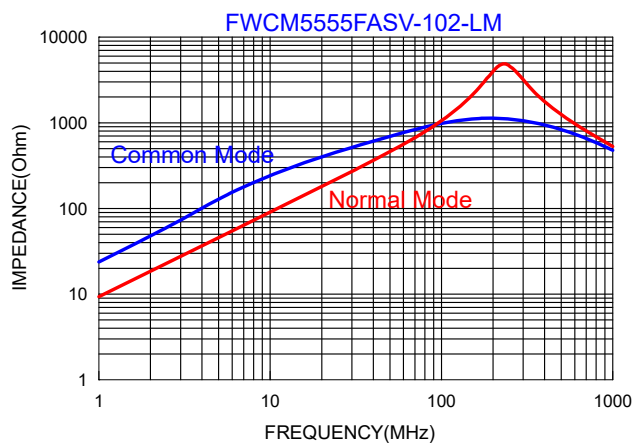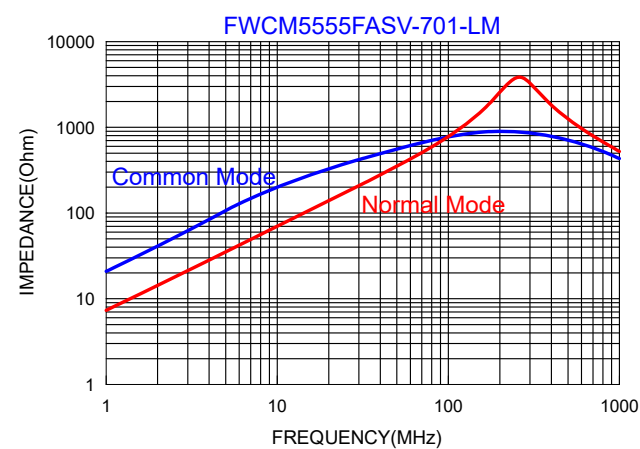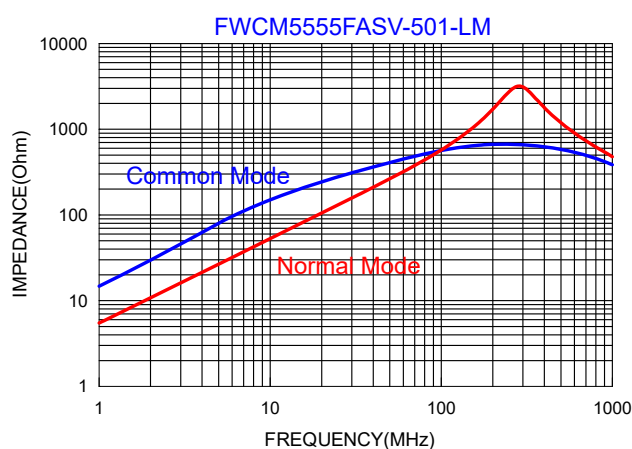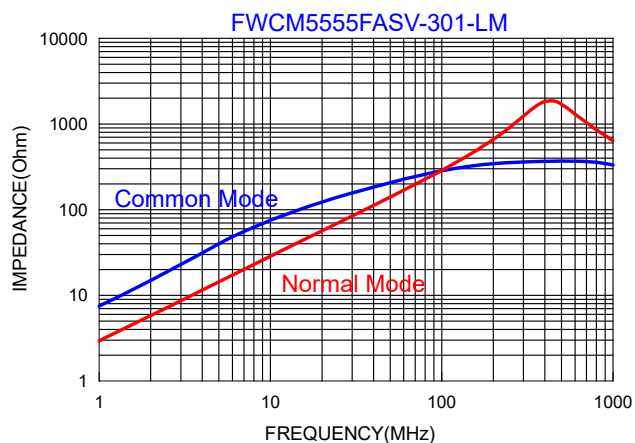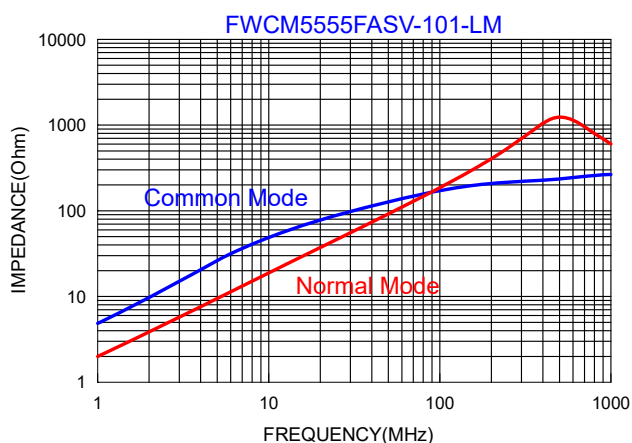

5. Schematic Diagram

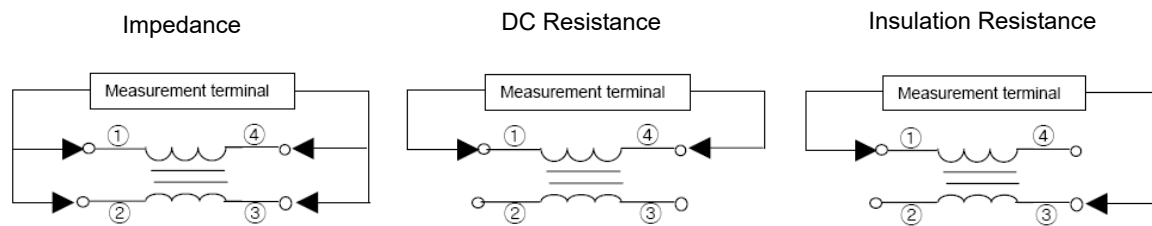

6. Recommended PC Board Pattern

	FWCM5555
L(mm)	5.9
H(mm)	4.3
G1(mm)	3.3
G2(mm)	1.9

