

SMD Power Inductor

TMPF0421HCV-Series(D)-D

1. Features


1. Low loss realized with low DCR.
2. High performance realized by metal dust core.
3. Ultra low buzz noise, due to composite construction.
4. 100% Lead(Pb)-Free & Halogen-Free and RoHS compliant.
5. High reliability -Reliability test complied to AEC-Q200.
6. Operating temperature -55~+155℃(Including self - temperature rise)



2. Applications

Automotive applications.


3. Dimensions

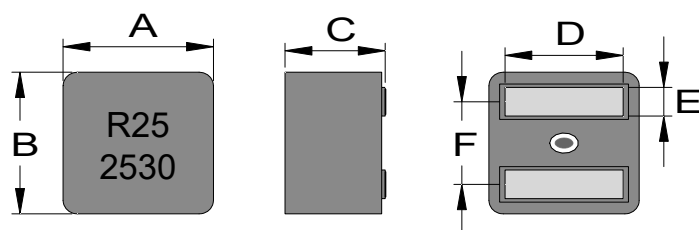

A	B	C	D	E	F
4.2±0.2	4.2±0.2	1.9±0.2	3.3±0.3	0.82±0.15	2.4±0.25

Unit:mm

Recommend PC Board Pattern



D	E	F
3.6	1.0	2.4

Note: 1.PCB layout is referred to standard IPC-7351B
 2. The above PCB layout reference only.
 3. Recommend solder paste thickness at 0.12mm and above.

4. Part Numbering

TMPF	0421	HCV	-	R25	MD	-	D
A	B	C		D	E		F

A: Series

B: Dimension

C: Type

D: Inductance

E: Inductance Tolerance

F: Code

BxC

Material.

R25=0.25uH

M=±20%, D: Coating

Marking: Black, R25 and 2530 (25 YY, 30 WW, follow production date).

5. Specification

Part Number	Inductance (uH) $\pm 20\%$ @ 0 A DC	I rms (A)		I sat (A)		DCR (mΩ)	
		Typ	Max	Typ	Max	Typ	Max
TMPF0421HCV-42NMD-D	0.042	40.0	36.0	52.0	48.0	0.83	1.0
TMPF0421HCV-R10MD-D	0.10	34.0	31.0	34.0	31.0	1.2	1.5
TMPF0421HCV-R11MD-D	0.11	33.0	30.0	33.0	30.0	1.3	1.6
TMPF0421HCV-R12MD-D	0.12	32.0	29.0	32.0	29.0	1.4	1.7
TMPF0421HCV-R20MD-D	0.20	27.0	24.0	26.0	23.0	2.0	2.4
TMPF0421HCV-R22MD-D	0.22	26.0	23.0	25.0	22.0	2.2	2.64
TMPF0421HCV-R25MD-D	0.25	24.0	22.0	23.0	21.0	2.5	3.0
TMPF0421HCV-R33MD-D	0.33	22.0	19.0	20.0	18.0	3.5	4.2
TMPF0421HCV-R47MD-D	0.47	19.0	16.0	17.0	15.0	4.2	5.1
TMPF0421HCV-R56MD-D	0.56	18.5	15.0	15.5	13.5	4.7	5.6
TMPF0421HCV-R60MD-D	0.60	18.0	14.0	15.0	13.0	5.1	5.9
TMPF0421HCV-R68MD-D	0.68	15.0	12.0	12.0	10.5	6.1	7.0
TMPF0421HCV-R82MD-D	0.82	14.0	11.5	11.5	10.0	7.7	8.6
TMPF0421HCV-1R0MD-D	1.00	12.5	10.5	9.5	8.5	8.1	9.0
TMPF0421HCV-1R2MD-D	1.20	11.5	9.5	9.0	8.0	10.5	11.8
TMPF0421HCV-1R5MD-D	1.50	10.5	9.0	8.5	7.5	13.0	14.3
TMPF0421HCV-2R0MD-D	2.00	8.5	7.5	7.0	6.0	17.8	20.0
TMPF0421HCV-2R2MD-D	2.20	8.0	7.0	6.2	5.7	19.5	21.5
TMPF0421HCV-3R3MD-D	3.30	6.6	5.6	5.5	5.0	30.8	34.0
TMPF0421HCV-4R7MD-D	4.70	5.7	5.2	4.8	4.3	40.0	44.0

Note:

1. Test frequency : L_s : 100KHz /1.0V.
2. All test data referenced to 25°C ambient.
3. Testing Instrument(or equ.) : Agilent 4284A, E4991A, 4339B, KEYSIGHT E4980A/AL, chroma3302, 3250, 16502.
4. Heat Rated current (I_{rms}) will cause the coil temperature rise approximately ΔT of 40°C.
5. Saturation current (I_{sat}) will cause L₀ to drop approximately 30%.
6. The part temperature (ambient + temp rise) should not exceed 155°C under worst case operating conditions.Circuit design,component,PCB trace size and thickness,airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.
7. I_{rms} Testing : Temperature rise is highly dependent on many factors including pcb land pattern, trace size, and proximity to other components. Therefore temperature rise should be verified in application conditions.
8. Rated DC current : The lower value of I_{rms} and I_{sat}.

6. Typical Performance Curves

