

Winding Type Chip Inductor


SWF2520CV-SERIES

1. Features

1. Ferrite core wire wound construction.
2. High Reliability due to wire wound type construction.
3. Small footprint as well as low profile.
4. Application for DC power line.
5. 100% Lead(Pb) & Halogen-Free and RoHS compliant.
6. High reliability -Reliability tests comply with AEC-Q200
7. Operating temperature -55~+125°C (Including self - temperature rise)



2. Dimensions

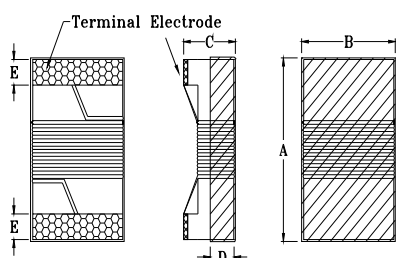

Size	A	B	C	D	E
SWF2520	2.90 max.	2.50 max.	2.10 max.	1.20 ref.	0.55±0.1

Unit:mm

3. Part Numbering



A: Series
 B: Dimension
 C: Application
 D: Category Code
 E: Inductance
 F: Inductance Tolerance

L x W
 DC Power Line
 V=Vehicle
 1R0=1.00 uH
 K=±10%, M=±20%

4. Specification

TAI-TECH Part Number	Inductance (uH)	Tolerance	Test Frequency (Hz)	Q Min.	Test Frequency (MHz)	Rated Current (mA) max.	DCR (Ω) max.	SRF (MHz) min.
SWF2520CV-1R0□	1.00	K,M	0.5V/7.96M	12	7.96	1000	0.13	345
SWF2520CV-1R5□	1.50	K,M	0.5V/7.96M	12	7.96	850	0.17	100
SWF2520CV-2R2□	2.20	K,M	0.5V/7.96M	12	7.96	775	0.21	78
SWF2520CV-3R3□	3.30	K,M	0.5V/7.96M	12	7.96	715	0.26	48
SWF2520CV-4R7□	4.70	K,M	0.5V/7.96M	12	7.96	505	0.52	46
SWF2520CV-6R8□	6.80	K,M	0.5V/7.96M	12	7.96	432	0.72	33
SWF2520CV-8R2□	8.20	K,M	0.5V/2.52M	12	2.52	410	0.76	30
SWF2520CV-100□	10.0	K,M	0.5V/2.52M	12	2.52	392	0.86	28
SWF2520CV-150□	15.0	K,M	0.5V/2.52M	12	2.52	342	1.09	21
SWF2520CV-220□	22.0	K,M	0.5V/2.52M	12	2.52	260	1.96	18
SWF2520CV-330□	33.0	K,M	0.5V/2.52M	12	2.52	236	2.47	15